





M1120 A2 HEMTT-LHS HEAVY EXPANDED MOBILITY TACTICAL TRUCK WITH LOAD HANDLING SYSTEM

Cab Seating: 2 person • air-ride seats • 4-point safety belts

Axle Configuration: 8x8

Curb Weight: 35,500 lbs.

Gross Vehicle Weight Rating (GVWR): 66,000 lbs.

Gross Combined Weight Rating (GCWR): 103,000 lbs.
(46762 kg)

Length: 400.5 in. (10173 mm)

Width: 96 in. (2438 mm)

Height (over spare tire): 112 in. (2845 mm)

Track: 77.82 in. (1977 mm)

Wheelbase: 210 in. (5334 mm)

Maximum Speed: 62 mph (100 kph)

Tires: 16.00 R20 XZL Michelin tubeless

Number of Tires: 8 + 1 spare

Optional Central Tire Inflation System (CTIS)

Fuel Capacity: 155 gal. (587 liter)

Cruising Range (GCW): 400 mi. (644 km) cross-country avg.

Fording: 48 in. (1219 mm)

Air Transportability: C130 • C141

Engine: DDC Model 8V92TA/445 hp 12.1 liter DDEC4

Transmission: Allison HD4560P/6-speed automatic

Transfer Case: Oshkosh 55,000/2-speed

Axles:

Front - Oshkosh 46K

Rear - Eaton DS480

Suspension:

Front - Hendrickson RT340 w/equalizing beam

Rear - Hendrickson RT340 w/36,000 lb. spring & equalizing beam

Electrical System: 24V start • 24V lighting with master electric disconnect

Brakes: Drum type • air actuated S-Cam

Steering: Power assist • front tandem

Lighting: LED lights on all sides • LED black-out drive light

Winch, Self-Recovery: 20,000 lbs. (9072 kg) optional

Winch, Recovery: N/A



Retrieval System: N/A

Fuel Servicing: N/A

Fifth Wheel Loading: N/A

Load Handling System: OTC/Multifit • 26,000 lbs. incl. FR.

Crane: N/A

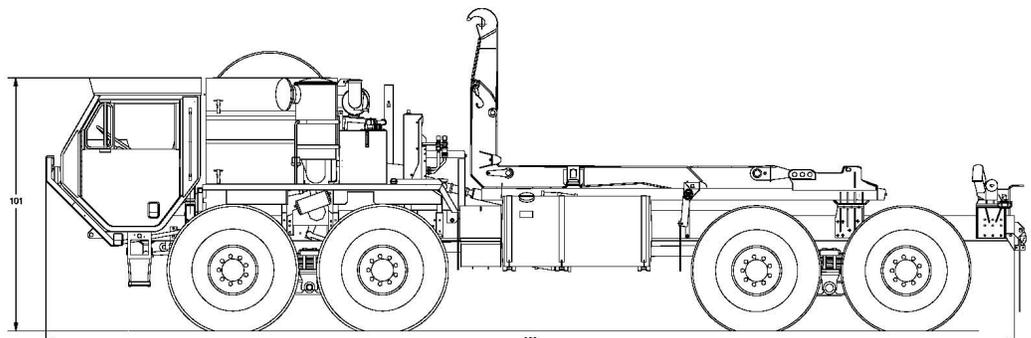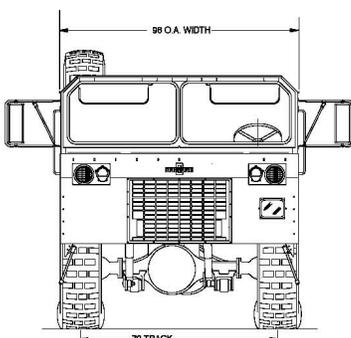



PERFORMANCE IN MOTION

www.oshkoshtruck.com

Oshkosh Truck Corporation • 2307 Oregon Street, P.O. Box 2566 • Oshkosh, WI, USA 54903-2566 • ph 1.920.235.9150 • fax 1.920.233.9506
Washington, DC Office • 1725 Jefferson Davis Hwy., Suite 706 • Arlington, VA, USA 22202 • ph 1.703.413.6200 • fax 1.703.413.6384
© 2002 Oshkosh Truck Corporation

® Oshkosh and the Oshkosh logo are registered trademarks of Oshkosh Truck Corporation

HEMTT 9/02